


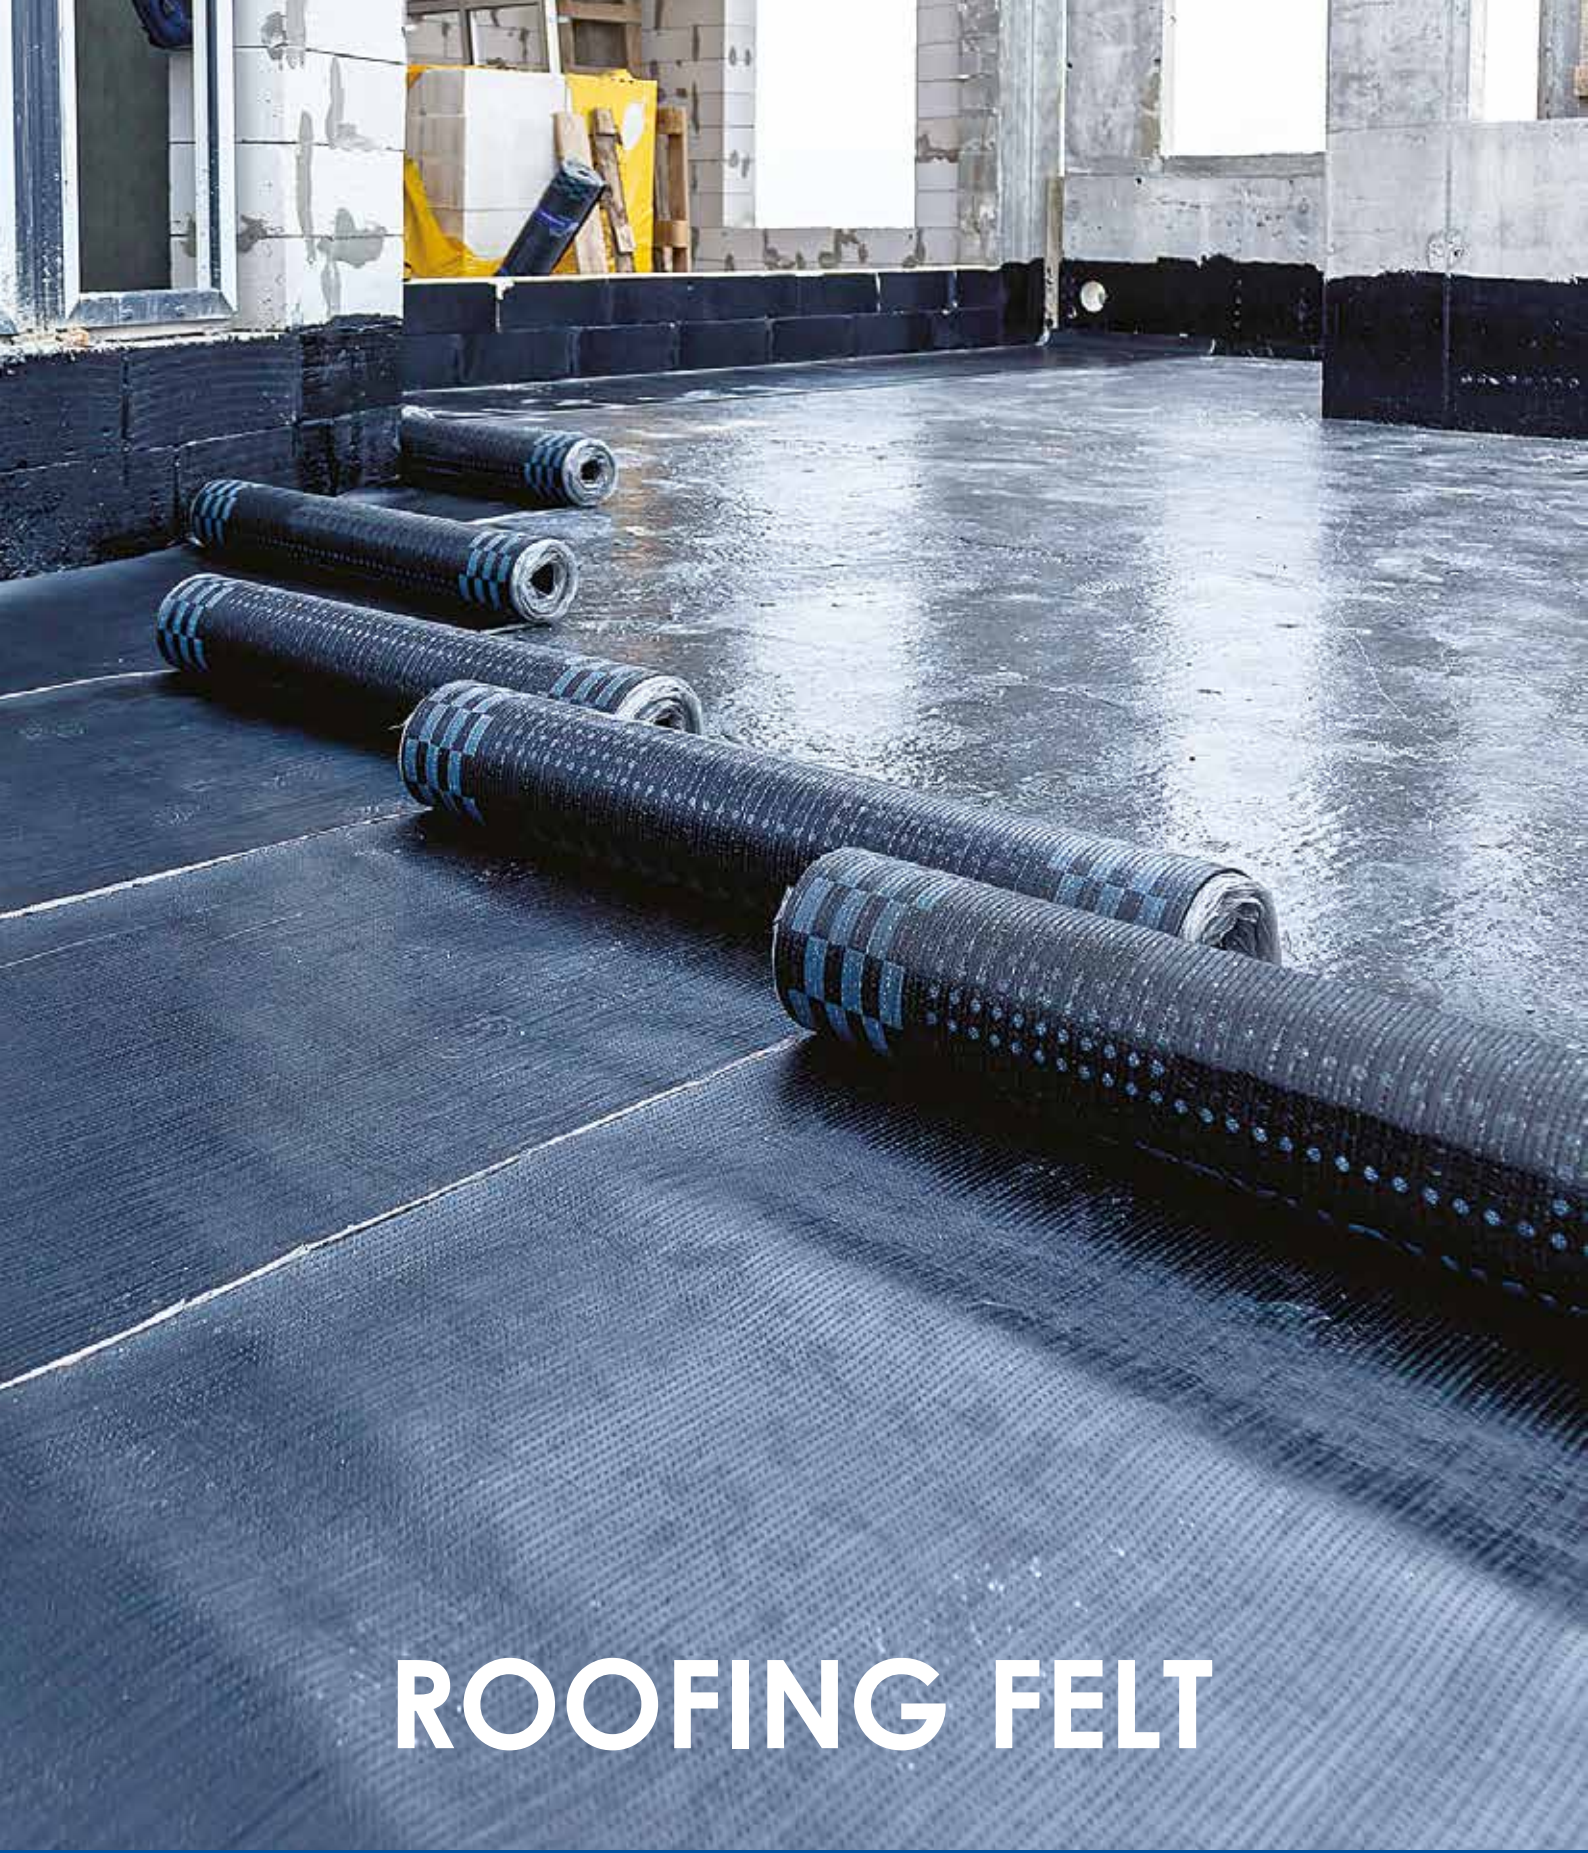

FENCYX WHOLESALE CATALOGUE

ROOFING FELT & ROOFING TILES

A photograph of a construction site showing several large rolls of black roofing felt with a blue and white checkered pattern on the edge. The rolls are laid out on a dark, wet, and reflective surface, likely a roof or a large sheet of plastic. In the background, there are concrete walls, windows, and some construction materials like yellow bags and wooden planks.

ROOFING FELT

<https://www.fencyx.co.uk>

MIDLANDS FELT® 0 °C

Weight, kg:	From 3.5kg to 6kg
Top surface:	Film // Sand or Slate**
Carrier:	Polyester / Fiberglass
Type:	Cap sheet / Underlay
Cold flexibility, C°:	0 °C
Modifier:	APP
Bottom:	Film
Roll length, m:	8 / 10 / 12 / 16

** Slate colours – Black, green, red, grey or white



NAME	TYPE	LAYER TYPE	CARRIER	TOP LAYER	COLD FLEXIBILITY, °C	ROLL LENGTH	WEIGHT kg/m2	PALLET ROLLS (QTY)	ITEM NR.
Midlands Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	0	8	4	36	FRF2000
Midlands Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	0	8	4.5	32	FRF2001
Midlands Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	0	8	5	29	FRF2002
Midlands Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	0	8	5.5	26	FRF2003
Midlands Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	0	8	6	24	FRF2004
Midlands Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	0	8	6.5	22	FRF2005
Midlands Felt	APP	Underlay	Fiberglass	Film // Send	0	16	2	36	FRF2006
Midlands Felt	APP	Underlay	Fiberglass	Film // Send	0	16	2.5	29	FRF2007
Midlands Felt	APP	Underlay	Fiberglass	Film // Send	0	16	3	24	FRF2008
Midlands Felt	APP	Underlay	Fiberglass	Film // Send	0	8	4	36	FRF2009
Midlands Felt	APP	Underlay	Fiberglass	Film // Send	0	8	4.5	32	FRF2010
Midlands Felt	APP	Underlay	Fiberglass	Film // Send	0	8	5	29	FRF2011

SCOT FELT® -5 °C



Weight, kg:	From 3.5kg to 6kg
Top surface:	Film // Sand or Slate**
Carrier:	Polyester / Fiberglass
Type:	Cap sheet / Underlay
Cold flexibility, C°:	-5 °C
Modifier:	APP
Bottom:	Film
Roll length, m:	8 / 10 / 12 / 16

** Slate colours – Black, green, red, grey or white

NAME	TYPE	LAYER TYPE	CARRIER	TOP LAYER/ BOTTOM LAYER	COLD FLEXIBILITY, °C	ROLL LENGTH	WEIGHT kg/m2	PALLET ROLLS (QTY)	ITEM NR.
Scot Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-5	8	4	36	FRF2012
Scot Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-5	8	4.5	32	FRF2013
Scot Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-5	8	5	29	FRF2014
Scot Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-5	8	5.5	26	FRF2015
Scot Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-5	8	6	24	FRF2016
Scot Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-5	8	6.5	22	FRF2017
Scot Felt	APP	Underlay	Fiberglass	Film // Send	-5	16	2	36	FRF2018
Scot Felt	APP	Underlay	Fiberglass	Film // Send	-5	16	2.5	28	FRF2019
Scot Felt	APP	Underlay	Fiberglass	Film // Send	-5	16	3	24	FRF2020
Scot Felt	APP	Underlay	Fiberglass	Film // Send	-5	8	4	36	FRF2021
Scot Felt	APP	Underlay	Fiberglass	Film // Send	-5	8	4.5	32	FRF2022
Scot Felt	APP	Underlay	Fiberglass	Film // Send	-5	8	5	29	FRF2023

BUILDERS FELT® -10 °C

Weight, kg:	From 3.5kg to 6kg
Top surface:	Film // Sand or Slate**
Carrier:	Polyester / Fiberglass
Type:	Cap sheet / Underlay
Cold flexibility, C°:	-10 °C
Modifier:	APP
Bottom:	Film
Roll length, m:	8 / 10 / 12 / 16

** Slate colours – Black, green, red, grey or white



NAME	TYPE	LAYER TYPE	CARRIER	TOP LAYER/ BOTTOM LAYER	COLD FLEXIBILITY, °C	ROLL LENGTH	WEIGHT kg/m2	PALLET ROLLS (QTY)	ITEM NR.
Builders Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-10	8	4	36	FRF2024
Builders Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-10	8	4.5	32	FRF2025
Builders Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-10	8	5	29	FRF2026
Builders Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-10	8	5.5	26	FRF2027
Builders Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-10	8	6	24	FRF2028
Builders Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-10	8	6.5	22	FRF2029
Builders Felt	APP	Underlay	Fiberglass	Film // Send	-10	16	2	36	FRF2030
Builders Felt	APP	Underlay	Fiberglass	Film // Send	-10	16	2.5	28	FRF2031
Builders Felt	APP	Underlay	Fiberglass	Film // Send	-10	16	3	24	FRF2032
Builders Felt	APP	Underlay	Fiberglass	Film // Send	-10	8	4	36	FRF2033
Builders Felt	APP	Underlay	Fiberglass	Film // Send	-10	8	4.5	32	FRF2034
Builders Felt	APP	Underlay	Fiberglass	Film // Send	-10	8	5	29	FRF2035

CORK FELT® -15 °C



Weight, kg:	From 3.5kg to 6kg
Top surface:	Film // Sand or Slate**
Carrier:	Polyester / Fiberglass
Type:	Cap sheet / Underlay
Cold flexibility, C°:	-15 °C
Modifier:	APP
Bottom:	Film
Roll length, m:	8 / 10 / 12 / 16

** Slate colours – Black, green, red, grey or white

NAME	TYPE	LAYER TYPE	CARRIER	TOP LAYER/ BOTTOM LAYER	COLD FLEXIBILITY, °C	ROLL LENGTH	WEIGHT kg/m2	PALLET ROLLS (QTY)	ITEM NR.
Cork Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-15	8	4	36	FRF2036
Cork Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-15	8	4.5	32	FRF2037
Cork Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-15	8	5	29	FRF2038
Cork Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-15	8	5.5	26	FRF2039
Cork Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-15	8	6	24	FRF2040
Cork Felt	APP	Cap Sheet	Polyester	Black / Green / Red Slate**	-15	16	2	36	FRF2041
Cork Felt	APP	Underlay	Fiberglass	Film // Send	-15	16	2	36	FRF2042
Cork Felt	APP	Underlay	Fiberglass	Film // Send	-15	16	2.5	28	FRF2043
Cork Felt	APP	Underlay	Fiberglass	Film // Send	-15	16	3	24	FRF2044
Cork Felt	APP	Underlay	Fiberglass	Film // Send	-15	8	4	36	FRF2045
Cork Felt	APP	Underlay	Fiberglass	Film // Send	-15	8	4.5	32	FRF2046
Cork Felt	APP	Underlay	Fiberglass	Film // Send	-15	8	5	29	FRF2047

FLEX FELT® -20 °C



Weight, kg:	From 3.5kg to 6kg
Top surface:	Film // Sand or Slate**
Carrier:	Polyester / Fiberglass
Type:	Cap sheet / Underlay
Cold flexibility, C°:	-20 °C
Modifier:	SBS
Bottom:	Film
Roll lenght, m:	8 / 10 / 12 / 16

** Slate colours – Black, green, red, grey or white

NAME	TYPE	LAYER TYPE	CARRIER	TOP LAYER/ BOTTOM LAYER	COLD FLEXIBILITY, °C	ROLL LENGTH	WEIGHT kg/m2	PALLET ROLLS (QTY)	ITEM NR.
Flex Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-20	8	4	29	FRF2048
Flex Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-20	8	4.5	26	FRF2049
Flex Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-20	8	5	24	FRF2050
Flex Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-20	8	5.5	36	FRF2051
Flex Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-20	8	6	32	FRF2052
Flex Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-20	8	6.5	22	FRF2053
Flex Felt	SBS	Underlay	Fiberglass	Film // Send	-20	16	2	36	FRF2054
Flex Felt	SBS	Underlay	Fiberglass	Film // Send	-20	16	2.5	28	FRF2055
Flex Felt	SBS	Underlay	Fiberglass	Film // Send	-20	16	3	26	FRF2056
Flex Felt	SBS	Underlay	Fiberglass	Film // Send	-20	8	4	36	FRF2057
Flex Felt	SBS	Underlay	Fiberglass	Film // Send	-20	8	4.5	32	FRF2058
Flex Felt	SBS	Underlay	Fiberglass	Film // Send	-20	8	5	29	FRF2059

RYMAN FELT® -25 °C

Weight, kg:	From 3.5kg to 6kg
Top surface:	Film // Sand or Slate**
Carrier:	Polyester / Fiberglass
Type:	Cap sheet / Underlay
Cold flexibility, C°:	-25 °C
Modifier:	SBS
Bottom:	Film
Roll lenght, m:	8 / 10 / 12 / 16

** Slate colours – Black, green, red, grey or white



NAME	TYPE	LAYER TYPE	CARRIER	TOP LAYER/ BOTTOM LAYER	COLD FLEXIBILITY, °C	ROLL LENGTH	WEIGHT kg/m2	PALLET ROLLS (QTY)	ITEM NR.
Ryman Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-25	8	4	36	FRF2060
Ryman Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-25	8	4.5	32	FRF2061
Ryman Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-25	8	5	29	FRF2062
Ryman Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-25	8	5.5	26	FRF2063
Ryman Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-25	8	6	24	FRF2064
Ryman Felt	SBS	Cap Sheet	Polyester	Black / Green / Red Slate**	-25	8	6.5	22	FRF2065
Ryman Felt	SBS	Underlay	Fiberglass	Film // Send	-25	8	4	36	FRF2066
Ryman Felt	SBS	Underlay	Fiberglass	Film // Send	-25	8	4.5	32	FRF2067
Ryman Felt	SBS	Underlay	Fiberglass	Film // Send	-25	8	5	29	FRF2068

(SELF) STICK FELT



Thickness, mm:	1,5	2
Roll width, m:	1	1
Cold flexibility, °C:	from -20 °C to -25 °C	from -20 °C to -25 °C
Roll length, m:	10 / 15 / 20	10 / 15 / 20
Tensile strength (max), N/5cm:		
Longitudinal, N/5cm:	450	450
Transversal, N/5cm:	300	300
Shear Resistant of Joints		
Longitudinal, N/5cm:	200	200
Transversal, N/5cm:	180	180
Resistance to impact, mm:	500	500
Elongation at break, %		
Longitudinal, %:	150	150
Transversal, %:	150	150
	10	10

(SELF) STICK FELT PRO

Thickness, mm:	1,5	2
Roll width, m:	1	1
Cold flexibility, °C:	from -20 °C to -25 °C	from -20 °C to -25 °C
Roll length, m:	10 / 15 / 20	10 / 15 / 20
Tensile strength (max), N/5cm:		
Longitudinal, N/5cm:	450	450
Transversal, N/5cm:	300	300
Shear Resistant of Joints		
Longitudinal, N/5cm:	200	200
Transversal, N/5cm:	180	180
Resistance to impact, mm:	500	500
Elongation at break, %		
Longitudinal, %:	150	150
Transversal, %:	150	150
	5	5



PRO BOARD

Thickness, mm:	3	4	6
Mass per unit area, kg/m ² :	4,5	5,9	8,8
Width, m:	1	1	1
Length, m:	2	2	2
Resistance to static loading, kg:	10	10	10
Resistance to impact, mm:	500	700	900
Flow resistance, °C:	110 °C	110 °C	110 °C

A close-up photograph of dark grey roofing tiles. The tiles are rectangular and laid in a staggered pattern. The surface of the tiles has a granular texture. The lighting is soft, creating subtle shadows between the tiles. Overlaid on the bottom half of the image is a solid purple rectangular area containing white text.

ROOFING TILES

<https://www.fencyx.co.uk>

ROOFING TILES

Fencyx Bitumen shields :

The Fencyx Bitumen shields heavyweight laminated shingle consists of a stable, non-woven mat that is fully saturated with stabilized waterproofing bitumen, ensuring exceptional dimensional durability.

Introducing the Fencyx Bitumen shields series: a range of flexible laminated shingles crafted from a dimensionally stable non-woven glass fiber mat. This mat is meticulously saturated and coated on both sides with a remarkably stable SBS modified bituminous blend, ensuring exceptional flexibility even in cold climates. The shingles are elegantly finished with a layer of colored slates on top. With a diverse array of colors available, you can effortlessly bring your architectural visions to life and give your home a truly distinctive and captivating appearance.




APPLICATIONS:

Cost-Effective Solution
Simplified Application
Swift Installation

Diverse Color Selection
Low Maintenance Requirements
Long-Term Value Enhancement



COLORS:



Black



Green



Red



Blue



Brown



Uses: Ideal for roof slopes exceeding 4:12, with underlayment strongly advised for slopes below 6:12. Suitable for low slope roofs as well (2:12 to 4:12).

SPECIFICATION:

CHARACTERISTICS	UNIT	RESULTS
Tear Strength	KG	≥40
Dimensional Stability	%	±0,5
Granule Retention:	%	Min 75
Static Puncture Resistance	KG	20
Classification Of Reaction to Fire		Class E

COLOR	ITEM NR.
BLACK	FRT2500
GREEN	FRT2501
RED	FRT2502
BLUE	FRT2503
BROWN	FRT2504





About Us:

Welcome to FENCYX, where excellence meets innovation in the construction and building material industries! Our unwavering commitment to enhancing the quality of our products and services has made us a trusted partner in the market.

At FENCYX, we thrive on delivering better and more efficient solutions that keep pace with the ever-evolving demands of the modern world. Specializing in the trade of building materials and constructions across Europe and Asia, our strategically located production facilities in the United Kingdom, Germany, Switzerland, Poland, Latvia, and the Middle East empower us to swiftly deliver to our valued customers' needs.

What sets us apart is our extensive logistical and trading experience, honed over the years to perfection. With every project we undertake, we take pride in surpassing expectations and making a tangible difference in the industry.

Experience the FENCYX difference today!

Product Features:

- FENCYX boasts an extensive selection of products that carry the prestigious FSC certification, embodying our dedication to sustainability and responsible sourcing.
- With BS and EN certifications in hand, our company upholds the highest industry standards, ensuring that our customers receive products of exceptional quality and compliance.
- We take great pride in our environmentally conscious approach to business, actively reducing our ecological footprint through sustainable practices.
- Embracing the spirit of innovation, we seamlessly integrate cutting-edge technologies into our daily operations, enhancing efficiency and effectiveness to better serve our clients.
- At FENCYX, our unyielding commitment to maintaining and elevating superior standards is reflected in the unmatched quality of our goods.
- From manufacturing to storage, distribution, and sales, our processes strictly adhere to international standard guidelines, assuring our customers of a reliable and consistent experience.

Our core values:

- At the heart of our business, we embrace integrity and professionalism as essential pillars.
- By constantly striving for improvement, we consistently go above and beyond to meet and exceed the expectations of our valued customers.
- Our achievements are rooted in the strength of collaboration and teamwork, enabling us to flourish as a united force.
- Nurturing a culture of respect, diversity, and inclusivity, we create an environment where everyone feels valued and empowered.
- Building strong relationships with stakeholders is founded on open and transparent communication.

For additional details, please reach out to us at info@fencyx.co.uk.



FENCYX

THE FUTURE OF CONSTRUCTION SUPPLY

 <https://www.fencyx.co.uk>

 info@fencyx.co.uk

 Sales department: +44 2081 443 331

 Business WhatsApp: +44 7852 562752